

## SUBSURFACE LAND DRAINAGE BY TUBE WELLS

WELL SPACING EQUATIONS FOR FULLY AND PARTIALLY PENETRATING  
WELLS IN UNIFORM OR LAYERED AQUIFERS WITH OR WITHOUT ANISOTROPY  
AND ENTRANCE RESISTANCE

R.J. Oosterbaan

International Institute for Land Reclamation and Improvement  
(ILRI), Wageningen, The Netherlands.

On website [www.waterlog.info](http://www.waterlog.info) , explanation of WellDrain model

Updated version of "Tube well spacing formulas for subsurface drainage" of same author. Published in: Smith, K.V.H. and D.W. Rycroft (eds.) Hydraulic Design in Water Resources Engineering: Land Drainage. Proceedings of the 2nd International Conference, Southampton University, p. 75-84. Springer-Verlag, Berlin, 1986.

### Table of contents:

<a href="#">1. INTRODUCTION.....</a>	<a href="#">2</a>
<a href="#">2. SOLUTIONS.....</a>	<a href="#">4</a>
<a href="#">3. PARTIALLY PENETRATING WELLS.....</a>	<a href="#">6</a>
<a href="#">4. TRANSMISSIVITY.....</a>	<a href="#">6</a>
<a href="#">5. ENTRANCE RESISTANCE.....</a>	<a href="#">7</a>
<a href="#">6. ANISOTROPY.....</a>	<a href="#">8</a>
<a href="#">7. LAYERED (AN) ISOTROPIC SOILS.....</a>	<a href="#">9</a>
<a href="#">8. RECTANGULAR WELL FIELD.....</a>	<a href="#">9</a>
<a href="#">REFERENCES.....</a>	<a href="#">11</a>

## 1. INTRODUCTION

Subsurface drainage of agricultural land can be done by horizontal pipe drainage systems, but when the aquifer is deep drainage by wells (vertical drainage) may be a feasible alternative because the well spacing can be quite wide achieving the same effect on the lowering of the water table.

The law of Darcy (Figure 1) states:

$$\frac{\delta J}{\delta X} = - \frac{V_x}{K_x} \quad (1)$$

where:

J is the level of the water table at distance X, taken with respect to the level of the impermeable base of the

aquifer (m)

X is a distance in horizontal direction (m)

$V_x$  is the apparent flow velocity at X in horizontal X-direction (m/day)

$K_x$  is the horizontal hydraulic conductivity (m/day)

$\delta X$  is a small increment of distance X (m)

$\delta J$  is the increment of level J over increment  $\delta X$  (m)

$\delta J/\delta X$  is the gradient of the water table at X (m/m)

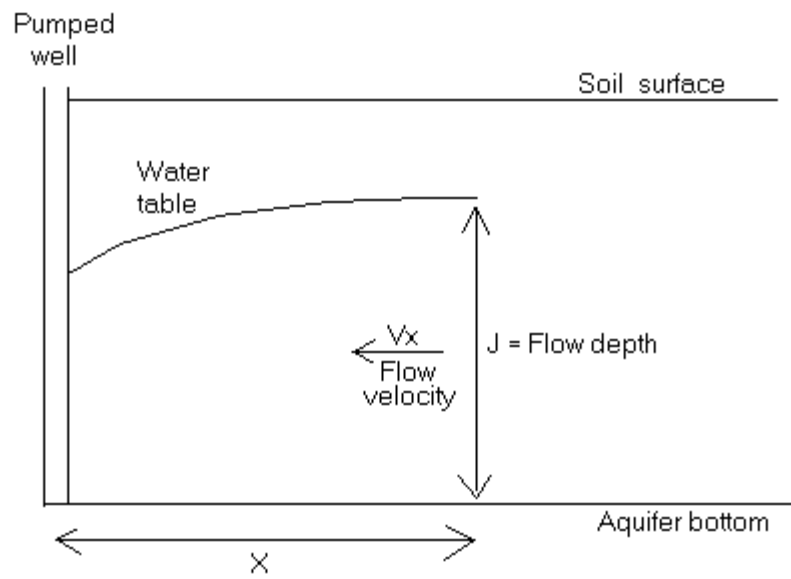


Figure 1. Cross-section over a well

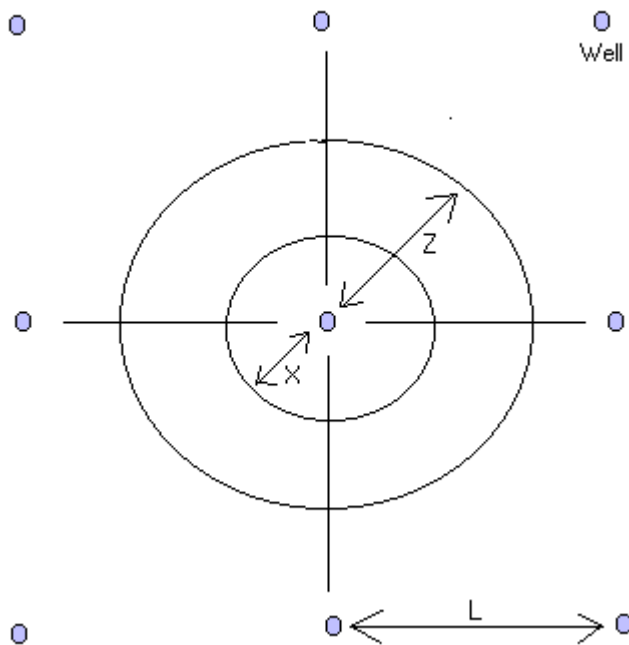


Figure 2. Square grid of wells with well spacing  $L$  and radius of influence  $Z$

The velocity of flow to a fully penetrating well, i.e. a well reaching the bottom of the aquifer, in a homogeneous aquifer can be found from the water balance (Figure 2) as:

$$V_x = \frac{\pi(Z^2 - X^2)R}{2\pi X.J} \quad (2)$$

where:

- R is the long term average (quasi steady) recharge by downward percolating water stemming from rain or irrigation water equalling the long term pumping rate from the well (m/day)
- Z the radius of a circle around the well to where the influence of the well extends, the zone of influence m)

The factor  $\pi(Z^2 - X^2)R$  represents the amount of water ( $m^3/day$ ) stemming from the surface of a segment between the circles with radius Z and X, and the factor  $2\pi X.J$  is the cylindrical cross-section ( $m^2/day$ ) of flow at distance X.

When the wells are arranged in a square pattern we may equate the surface area under the radius of influence of the well with the surface area geometrically associated with a well:

$$\pi Z^2 = L^2 \text{ so that } Z = 0.56 L \text{ and } L = 1.77 Z \quad (3)$$

For a regular triangular pattern we find  $L = 1.73 Z$  and  $L = 0.58 Z$ . The difference is relatively small.

When the well pattern is somewhat irregular we may use:  $L = 0.57\sqrt{A/N}$ , where A is the area served by N wells, and  $Z = \{\sqrt{A/N}\}/1.75$  using factors intermediate between those found before.

## 2. SOLUTIONS

The previous equations can be solved analytically for Z (Boehmer and Boonstra 1994, Oosterbaan 1986) for fully penetrating wells as in Figure 1, but for partially penetrating wells an analytical solution is difficult, the more so if one wishes to know the shape of the water table from the well to the end of the zone of influence. The model WellDrain on website [www.waterlog.info/welldrain.htm](http://www.waterlog.info/welldrain.htm) therefore uses a numerical solution using the following input data:

Long term average recharge or discharge	R	(m/day)
Bottom depth of 1st layer below the soil surface (s.s.)	D1	(m)
Bottom depth of 2nd layer below s.s.	D2	(m)
Depth water level in well below s.s. (long term average)	Dw	(m)
Depth of well bottom below s.s	Db	(m)
Entrance resistance at the well	E	(day/m)
Diameter of well screen	W	(m)
Permeability above water level in well	Ka	(m/day)
Horizontal permeability, 1st soil layer	Kb1	(m/day)
Vertical permeability, 1st soil layer	Kv1	(m/day)
Horizontal permeability, 2nd soil layer	Kb2	(m/day)
Vertical permeability, 2nd soil layer	Kv2	(m/day)
Depth water table midway between wells (long term average)	Dm	(m)
Spacing between wells	L	(m)

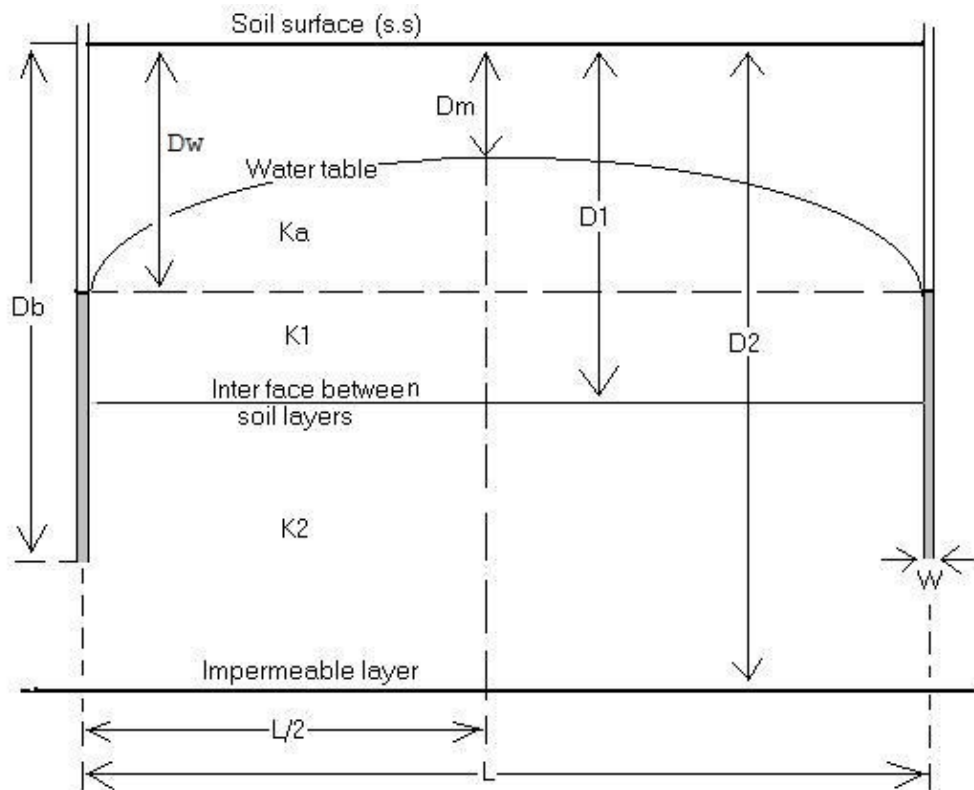


Figure 3. Illustration of input data for the WellDrain program

The depth  $D1$  can be greater or smaller than  $Dw$ . It can even be zero, meaning that one soil layer is not present. Also it can be equal to  $D2$  meaning that another soil layer is not present.

### 3. PARTIALLY PENETRATING WELLS

When the wells penetrate only partially into the aquifer (Figure 4) the flow in the neighbourhood of the well moves radially up from the underground. As the flow is also radial in a horizontal plane, it becomes spherical flow (Oosterbaan 1986).

To account for the radially upward moving water, the horizontal impermeable is partly replaced by an imaginary impermeable layer sloping downward from the well bottom to the real impermeable layer with a slope at an angle whose tangent equal to  $\frac{1}{2}\pi$ , much in the same way as described by Oosterbaan (2002) using the Hooghoudt principle.

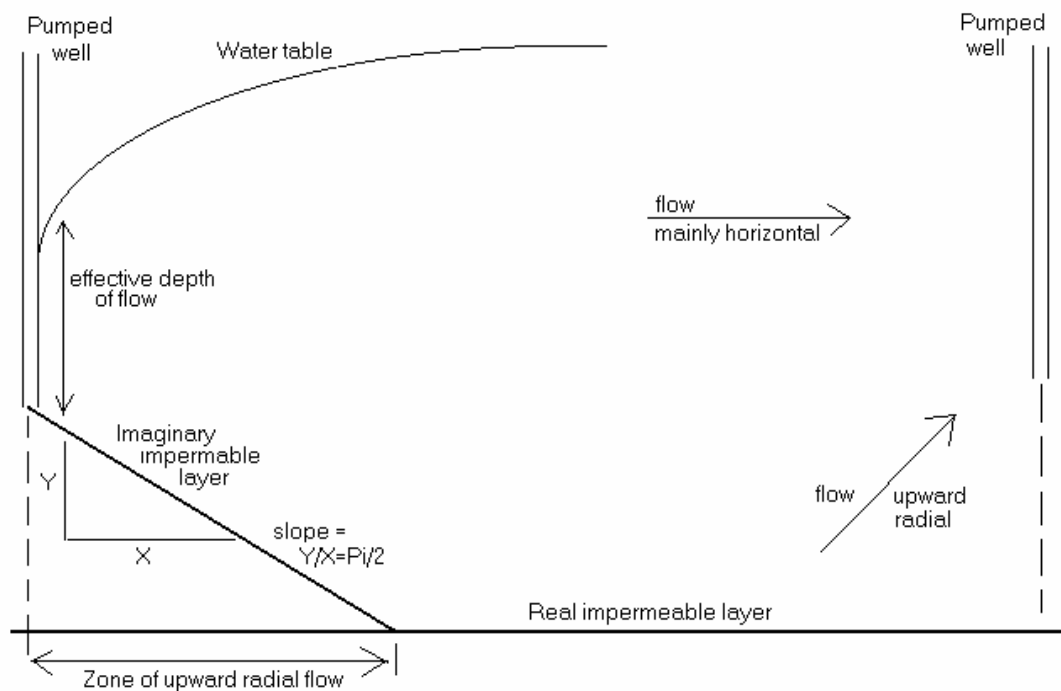


Figure 4. Illustrating the imaginary impermeable layer in the presence of partially penetrating wells.

### 4. TRANSMISSIVITY

Transmissivity is defined as the product of horizontal hydraulic conductivity and thickness of the saturated soil layer. Since the water table gets higher away from the drain, the transmissivity increases away from the drain. When

partially penetrating wells are present there is a further increase in transmissivity because the imaginary impermeable layer descends away from the drain. Figure 5 gives an example.

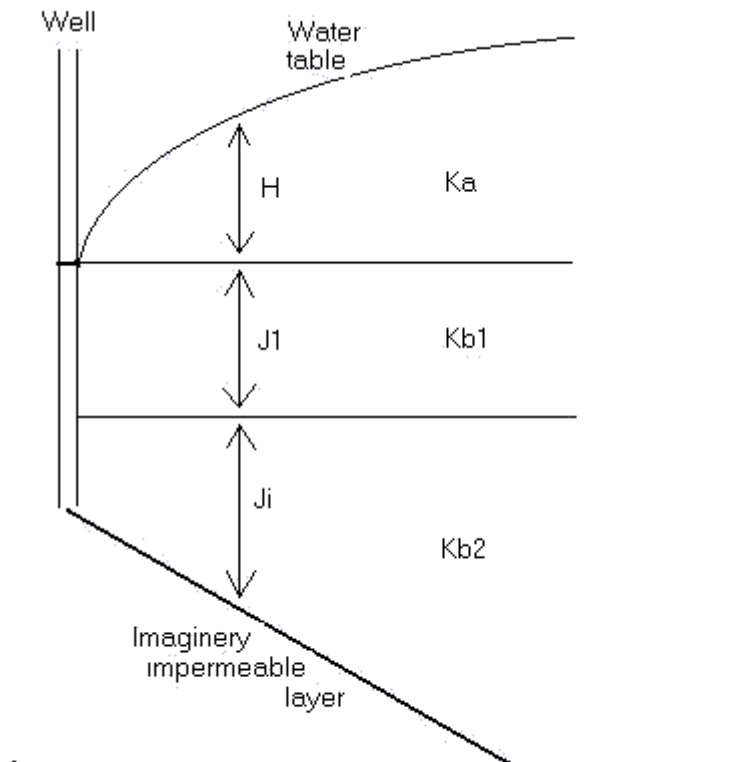


Figure 5. The transmissivity in the cross-section shown equals  
 $T = H.Ka + J1.Kb1 + Ji.Kb2$

## 5. ENTRANCE RESISTANCE

When entrance resistance is present, the water level just outside the well is higher than inside by a difference  $F_e$  (m), the entrance head (Figure 6).

Entrance resistance is defined as  $E = F_e/Q$  (day/m), where  $Q$  is the flow entering the well in  $m^3/day$  per m length of submerged part of the well. Hence  $Q = \pi R.Z^2/(Db-Dw)$ .

Therefore  $F_e = \pi E.R.Z^2/(Db-Dw)$ .

The effect of entrance resistance is somewhat diminished by an increased transmissivity.

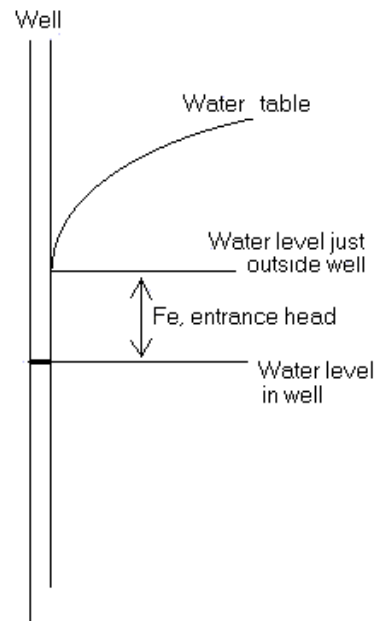


Figure 6. Entrance head due to entrance resistance.

## 6. ANISOTROPY

The hydraulic conductivity of the soil may change with depth and be different in horizontal and vertical direction. We will distinguish a horizontal conductivity  $K_a$  of the soil above drainage level, and a horizontal ( $K_b$ ) and vertical ( $K_v$ ) conductivity below drainage level. The following principles are only valid when  $K_v > R$ , otherwise the recharge  $R$  percolates downwards only partially and the assumed water balance is not applicable.

The effect of the conductivity  $K_v$  is taken into account by introducing the anisotropy ratio  $A = \sqrt{K_b/K_v}$ , as described for example by Boumans (1979). The conductivity  $K_b$  is divided by this ratio, yielding a transformed conductivity:  $K_t = K_b/A = \sqrt{K_b \cdot K_v}$ . As normally  $K_v < K_b$ , we find  $A > 1$  and  $K_t < K_b$ . On the other hand, the thickness  $J$  of the aquifer below the bottom level of the well is multiplied with the ratio. Hence the transformed depth is:  $J_t = A \cdot J$

When  $A > 1$ , the zone of upward radial flow increases. The effect of the transformation is that the extended area of upward radial flow and the reduced conductivity  $K_t$  increase the



resistance to the flow and enlarges the height of the water table. In extreme cases the extended area reaches beyond the zone of influence, which means that the lower part of the aquifer does not contribute to the flow of water.

## **7. LAYERED (AN) ISOTROPIC SOILS**

The soil may consist of distinct (an)isotropic layers. In the following model, three layers are discerned.

The first layer reaches to a depth  $D_w$  below the soil surface, corresponding to the water level in the well, and it has an isotropic hydraulic conductivity  $K_a$ . The layer represents the soil conditions above drainage level.

The second layer has a reaches to depth  $D_1$  below the soil surface ( $D_1 > D_w$ ). It has horizontal and vertical hydraulic conductivities  $K_{b1}$  and  $K_{v1}$  respectively with an anisotropy ratio  $A_1 = \sqrt{K_{b1}/K_{v1}}$ . The transformed conductivity is  $K_{t1} = K_{b1}/A_1$ . The thickness  $J_1 = D_1 - D_w$  is transformed to  $J_{t1} = A_1 \cdot J_1$ .

The third layer rests on the impermeable base at a depth  $D_2$  ( $D_2 > D_1$ ). It has a thickness  $J_2 = D_2 - D_1$  and horizontal and vertical hydraulic conductivities  $K_{b2}$  and  $K_{v2}$  respectively with an anisotropy ratio  $A_2 = \sqrt{K_{b2}/K_{v2}}$ ,. The transformed conductivity is  $K_{t2} = K_{b2}/A_2$ , and the transformed thickness is  $J_{t2} = A_2 \cdot J_2$ .

The transmissivity of the aquifer now is:

$$T = H \cdot K_a + J_{t1} \cdot K_{t1} + J_{t2} \cdot K_{t2}$$

## **8. RECTANGULAR WELL FIELD**

When the wells are placed in a rectangular well field with length  $A$  and width  $B$  ( $A > L > B$ ), we have:

$$L = \sqrt{A \cdot B}$$

The height  $H_A$  of the water table midway between the distance  $A$  is somewhat larger than the height  $H_L$  midway between the distance  $L$ . On the other hand, the height  $H_B$  of the water table midway between the distance  $B$  is somewhat smaller than the

height  $H_L$  midway between the distance  $L$ .

The difference  $\Delta H_A = H_A - H_L$  is:

$$\Delta H_A = Bd(Ad-L)R/T_A$$

where

$$T_A = (H_L + 0.5\Delta H_A)K_a + J_{t1}.K_{t1} + J_{t2}.K_{t2}$$

The difference  $\Delta H_B = H_L - H_B$  is:

$$\Delta H_B = Ad(L-Bd)R/T_B$$

where

$$T_B = (H_L - 0.5\Delta H_B)K_a + J_{t1}.K_{t1} + J_{t2}.K_{t2}$$

Hence, the depth of the water table  $D_A$  midway between the larger distance  $Ad$  is somewhat smaller than the depth  $D_m$  midway between the distance  $L$ , and the depth of the water table  $D_B$  midway between the shorter distance  $Bd$  is somewhat smaller than the depth  $D_m$  midway between the distance  $L$ .

The calculation of  $\Delta H_A$  and  $\Delta H_B$  requires a procedure of trial and error because these values are needed in advance for the calculation of  $T_A$  and  $T_B$ . When the aquifer is thick, the transmissivities  $T_A$  and  $T_B$  can be approximated simply by

$$T_A = T_B = H_L.K_a + J_{t1}.K_{t1} + J_{t2}.K_{t2}$$

without committing a large error.

The WellDrain program - under the option "calculate depth of the water table" - handles a rectangular well layout as follows.

For the shorter spacing  $Bd$ , with an area  $S_b = Bd.Bd$ , the equivalent zone of influence  $Z$  is decreased to  $Z_b = \sqrt{(S_b/\pi)}$ . To assure the same well discharge, the recharge  $R$  is increased to  $R_b = R.(Ad.Bd)/S_b$ , where  $Ad.Bd$  is the actually drained area. The calculation of the hydraulic head now proceeds in the same way as for the case of equidistant spacing  $L$ .

For the larger spacing  $Ad$ , with an area  $S_a = Ad.Ad$ , the equivalent zone of influence  $Z$  is increased to  $Z_a = \sqrt{(S_a/\pi)}$ . To assure the same well discharge, the recharge  $R$  is decreased to  $R_a = R.(Ad.Bd)/S_a$ , where  $Ad.Bd$  is the actually drained area. The calculation of the hydraulic head now proceeds in the same way as for the case of equidistant spacing  $L$ .

**REFERENCES**

- Boehmer, W.K. and J.Boonstra (1994). Tubewell Drainage systems. In: H.P.Ritzema (Ed), Drainage Principles and Application, p. 931-964, ILRI Publ 16., Wageningen, The Netherlands.
- Boumans, J.H. (1979). Drainage calculations in stratified soils using the anisotropic soil model to simulate hydraulic conductivity conditions. In: J.Wesseling (Ed.), Proceedings of the International Drainage Workshop, p. 108-123. Publ. 25, ILRI, Wageningen, The Netherlands.
- Oosterbaan, R.J. (1986). Tube-well Spacing Formulas for Subsurface Drainage. In: K.V.H.Smith and D.W.Rycroft (Eds.), Proceedings of the 2<sup>nd</sup> International Conference, Southampton University, UK.
- Oosterbaan, R.J. (2002). The Energy Balance of Groundwater Flow Applied to Subsurface Drainage in Anisotropic Soils by Pipes or Ditches with Entrance Resistance. On website [www.waterlog.info/articles.htm](http://www.waterlog.info/articles.htm).